

<http://www.lcdtvenclosure.com>

## Recessed Anti Ligature TV Enclosure. (Patent pending).



The only FULLY recessed non loop TV enclosure will accommodate both plasma and LCD screens for psychiatric units and correction facilities. Made from steel the enclosures bolt directly to the wall studs via the 3 mounting holes in each side of the enclosure (3/8 or 10mm diameter), cable glands are positioned in the top of the enclosure 1 for power and 1 for data.

### *Each unit comes with:*

- An internal TV mount for VESA 100 x 100, 200 x 200, 400 x 200
- The door is secured with 2 high security locks
- The viewing window is made from Lexan.

US Office: 8 The Green, Suite #6777  
Dover, DE 19901  
T: (862) 234-5981



<http://www.lcdtvenclosure.com>

***Enclosures available in the following sizes:***

Code: RNL26 For screens 17" to 26"

Code: RNL36 For screens 27" to 36"

Code: RNL46 For screens 37" to 46"

Code: RNL55 For screens 47" to 55"

Code: RNL65 For screens 56" to 65"

Code: RNL75 For screens 66" to 75"

**Assembly information.**

**Cooling system.**

The thermostatic cooling system is shipped fitted to the enclosure; on delivery this needs to be set to the internal temp desired with the internal thermostat to the required temperature.


**Internal TV Bracket.**

Remove the arms from the TV rear mounting plate and fix them to the rear of the television set, then hang the TV on the mounting frame and secure into position.

**Finishing off.**

Then ensuring the enclosure is secured to the studwork, lock the enclosure and then fill any gaps around the aperture with pick proof caulking.

<http://www.lcdtvenclosure.com>

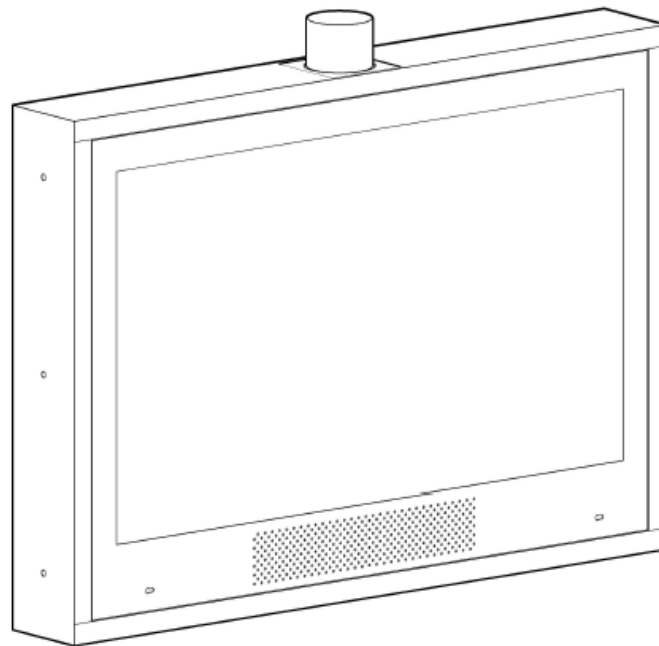

Side mounting holes for studwork are positioned 3.94" (100mm) up from the bottom of the enclosure and 3.94" (100 mm) down from the top, with the middle hole positioned equally.

Each ProEnc recessed enclosure comprises:

- Mounted to internal studwork (both sides)
- Hot air exhausted into void from enclosure
- Audio vented door
- 2 x High Security locks
- Fully flush enclosure
- Any gaps during installation between wall and enclosure fill with pick proof caulking
- Thickest viewing window in the industry
- Internal TV bracket
- Thermostatic cooling system

**For more details and pricing contact ProEnc on (862) 234-5981**